

# GRAS 46BC

1/4" CCP Multifield Microphone Set, High Sensitivity



Freq range: 4 Hz to 20 kHz  
Dyn range: 25 dB(A) to 145 dB  
Sensitivity: 20 mV/Pa

The 46BC is a high-sensitivity, low-noise, multifield 1/4" CCP condenser microphone set with rear venting and is optimized for use with the protection grid.

## GRAS 46BC multifield microphone

46BC is a true multifield microphone for use in pressure, free-field, or random-incidence environments or any scenarios where the sound field is ill-defined or changing. The design of this microphone takes advantage of the microphone's small dimensions and slightly enhances the high-frequency content, which results in the perfect microphone for in-cabin measurements or any scenarios where measuring in a random incidence environment is needed.

Sound fields have historically been defined in microphone standards as pressure, free field, or random incidence. Multifield microphones can accurately measure in any field or in any combination of the defined fields.

In all situations, sound fields, and angles of incidence, 46BC is compliant with IEC 61672 Limits.

### 46BC protection grid

Unlike other  $\frac{1}{4}$  microphones, 46BC is optimized for use with the protection grid. This feature ensures protection during in-cabin measurements.

**NOTE:** The protection grid creates a resonance that will occur around 35 kHz. This resonance is in the order of magnitude of + 6 dB.

### Microphone set concept

Data safety is highly important because the costs related to unsuited and unreliable sensors may determine whether your project turns into a success or not.

For users, data safety translates directly into tools that allow for easier microphone selection, simple system configuration, and reduction of measurement errors.

The microphone set concept. It is simple, reliable, and robust and consists of a microphone cartridge and preamplifier combination, which is calibrated as one unit. This eliminates errors because there is only one sensitivity value to account for and the risk of contaminating the interface is eliminated. Combine this with our unique and proven design and you have the most reliable measurement microphone sets available in the industry today.

## Typical applications and use

The small size and optimized frequency response make 46BC ideally suited for applications where the sound field is ill-defined or changing. This is due to the combination of size and optimization, which reduces the influence of angle of incidence of source positions and reflections. The result is a reduction in measurement uncertainty in applications such as in-cabin noise, architectural acoustics, and outdoor measurements. GRAS 46BC is also well suited for general acoustic measurements where high sensitivity and low noise are required.

#### NOTES:

- To achieve optimal performances 46BC must be powered on for at least two minutes before starting a measurement.
- Unlike other CCP microphones, a positive pressure on the 46BC diaphragm generates a negative output voltage.

### Compatibility

To perform as specified, the GRAS 46BC microphone set requires a constant current input module that can deliver 3.5 mA and 24 V unloaded CCP voltage supply. If the constant current supply is lower, the capability of driving long cables is reduced, and

consequently, the upper frequency is reduced. If the voltage supply is lower, it will influence the upper dynamic range.

The microphone set is terminated with a 10/32 Microdot female connector. Ready-to-use coax cable assemblies of various types and lengths are available in standard as well as customized lengths.

The 46BC is IEEE 1451.4 TEDS v. 1.0 compliant. If your measurement platform supports Transducer Electronic Data Sheets (TEDS), you will be able to read and write data like properties and calibration data.

## System verification

The functionality of TEDS is very useful to determine which microphone is connected to which input channel. However, it is not a check of whether the microphone is within specifications or not. For daily verification and check of your measurement setup, we therefore recommend using a sound source like the [GRAS 42AG](#) Sound Calibrator.

For proper sensitivity calibration we recommend using a reference sound source like the [GRAS 42AP](#) Intelligent Pistonphone.

## Calibration

46BC has a diaphragm that is slightly larger in diameter than is standard for 1/4" microphones. This does not affect sensitivity calibration, but for frequency calibration, you need a RA0236 Adapter.

When leaving the factory, all GRAS microphones have been calibrated in a controlled laboratory environment using traceable calibration equipment. Depending on the use, measurement environment, and internal quality control programs we recommend that the microphone is recalibrated at least once a year.

We offer two kinds of calibration as an optional after-sales service: GRAS Traceable Calibration and GRAS Accredited Calibration.

GRAS Traceable Calibration is a traceable calibration performed by trained personnel under controlled conditions according to established procedures and standards. This is identical to the rigorous calibration that all GRAS microphones are subjected to as an integral part of our quality assurance.

GRAS Accredited Calibration is performed by the GRAS Accredited Calibration Laboratory that has been accredited in accordance with ISO 17025 by DANAK, the Danish Accreditation Fund.

If you want a new microphone set delivered with an accredited calibration instead of the default factory calibration, specify this when ordering.

Learn more at [calibration](#).

## Quality and warranty

GRAS microphone sets are made of components from our proven standard portfolio and are all manufactured of high-quality material and branded parts that were chosen and processed to ensure life-long stability and robustness.

All parts are manufactured and assembled at the factory in Denmark by skilled and dedicated operators in a verified clean-room environment. The microphone diaphragm, body and unique protection grid are made of high-grade stainless steel and make the microphone set resistant to physical damage as well as corrosion caused by aggressive air or gasses.


This, together with the enforced gold-plated microphone terminal, guarantees a highly reliable connection. Thanks to the high quality, our warranty against defective materials and workmanship is five

years.


## Service

Should you by mistake damage the diaphragm on a GRAS microphone we will in most cases be able to exchange it at a very reasonable cost and short turn-around time. This not only protects your investment but also meets your quality assurance department since you do not have to worry about new serial numbers etc.


|   |   |                           |
|---|---|---------------------------|
| Polarization/Connection                                 |   | 0 V / CCP                 |
| Frequency range ( $\pm 1$ dB)                           | Hz  | 10 to 10k                 |
| Frequency range ( $\pm 3$ dB)                           | Hz  | 4 to 20k                  |
| Set sensitivity @ 250 Hz ( $\pm 2$ dB)                  | mV/Pa   | 20                        |
| Set sensitivity @ 250 Hz ( $\pm 2$ dB)                  | dB re 1V/Pa                                     | -34                       |
| Output impedance  | $\Omega$  | <50                       |
| Output Voltage Swing, min. @ 24-28 V CCP voltage supply | Vp  | 8                         |
| Power supply min. to max.                               | mA  | 3.5 to 10                 |
| DC bias voltage, typ.                                   | V   | 14                        |
| Microphone venting                                      |   | Rear                      |
| IEC 61094-4 Designation                                 |   | WS3F                      |
| Temperature range, operation                            | $^{\circ}\text{C} / ^{\circ}\text{F}$           | -20 to 80 / -4 to 176     |
| Temperature range, storage                              | $^{\circ}\text{C} / ^{\circ}\text{F}$           | -40 to 85 / -40 to 185    |
| Temperature coefficient @250 Hz                         | dB/ $^{\circ}\text{C}$ / dB/ $^{\circ}\text{F}$ | -0.02 / -0.012            |
| Static pressure coefficient @250 Hz                     | dB/kPa  | -0.01 (typical value)     |
| Humidity range non condensing                           | % RH  | 0 to 90                   |
| Influence of axial vibration @1 m/s <sup>2</sup>        | dB re 20 $\mu\text{Pa}$                         | 60 (typical value)        |
| TEDS UTID (IEEE 1451.4)                                 |   | 27 v. 1.0                 |
| Connector type  |   | Microdot 10/32            |
| CE/RoHS compliant/WEEE registered                       |   | Yes / Yes/Yes             |
| Weight  | g / oz  | 8 / 0.282                 |
| Dynamic range lower limit with GRAS preamplifier        | dB(A)   | Max 25<br>Typical 23.5    |
| Dynamic range upper limit with GRAS CCP preamplifier    | dB  | 142 RMS<br>145 Peak level |
| Dynamic range   | dB  | 120                       |

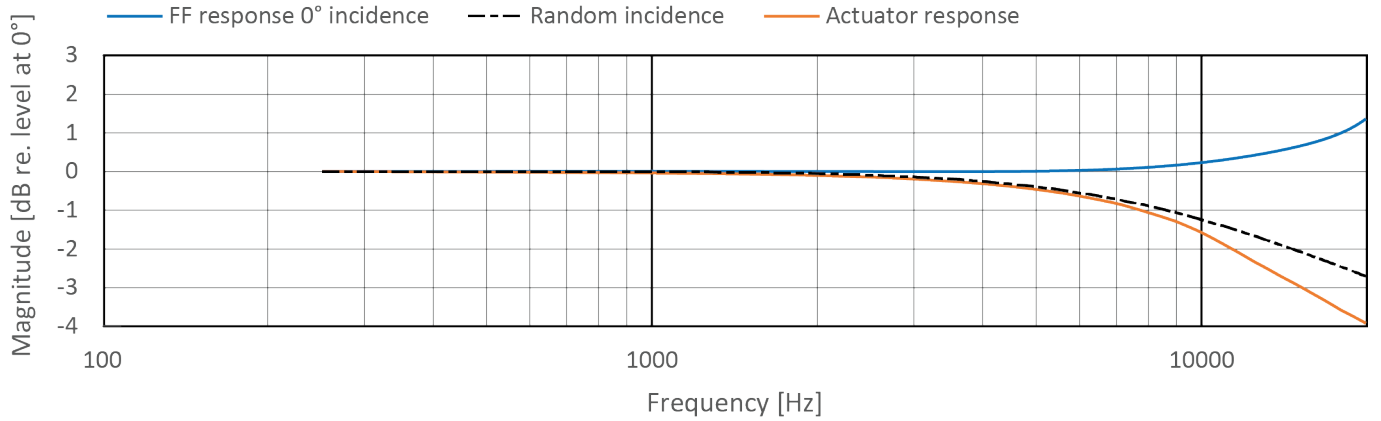


*Typical frequency response (with protection grid)*

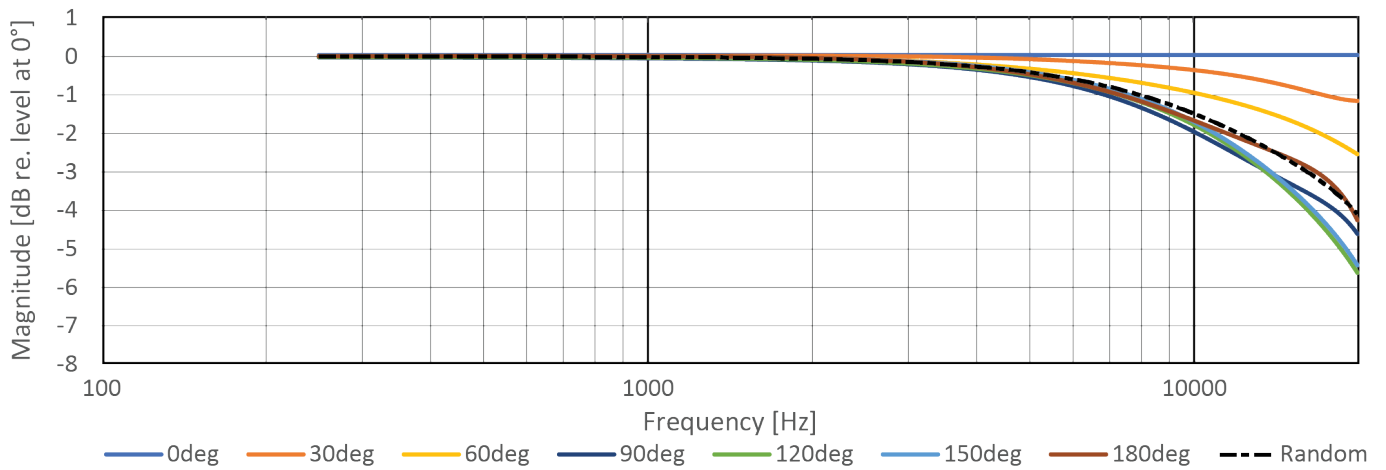


*Free-field and Random-incidence corrections*

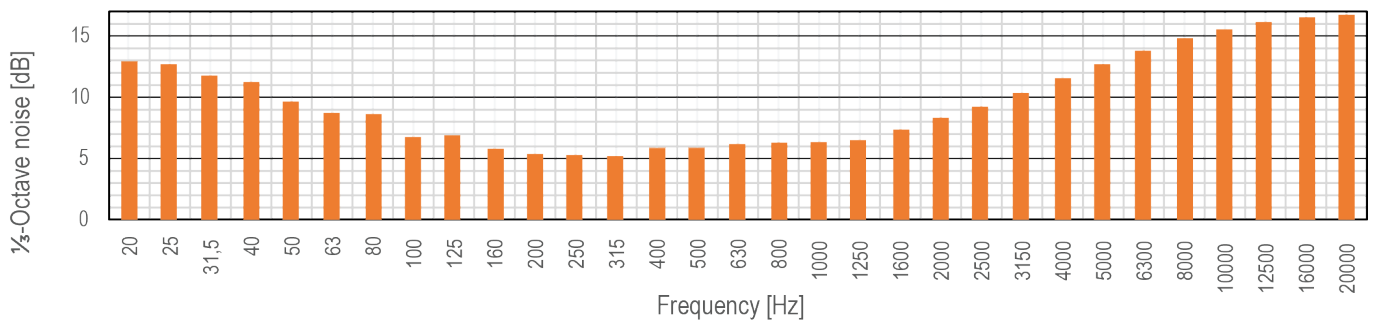

*1/2-octave noise curve, linear*

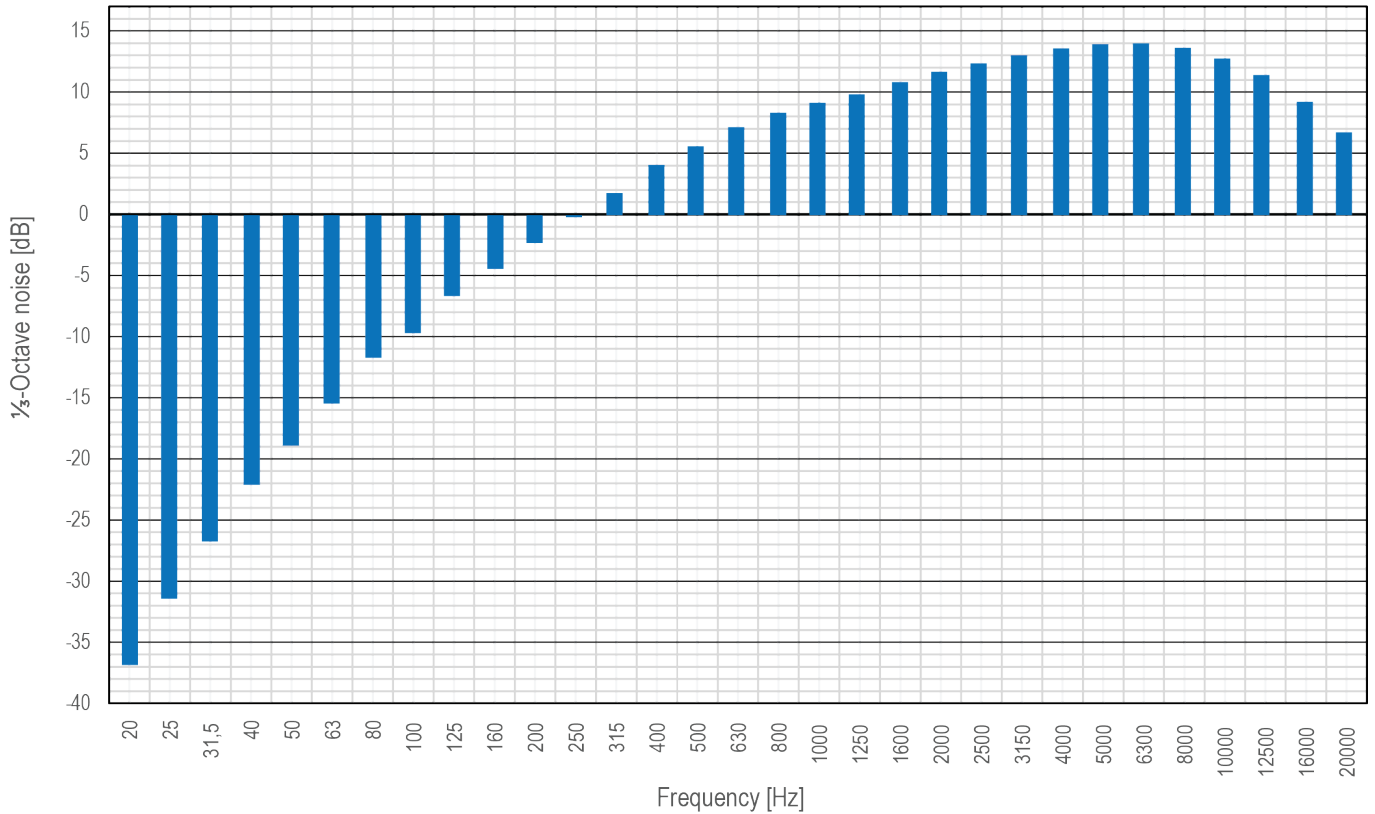

*1/3-octave noise curve, A-weighted*


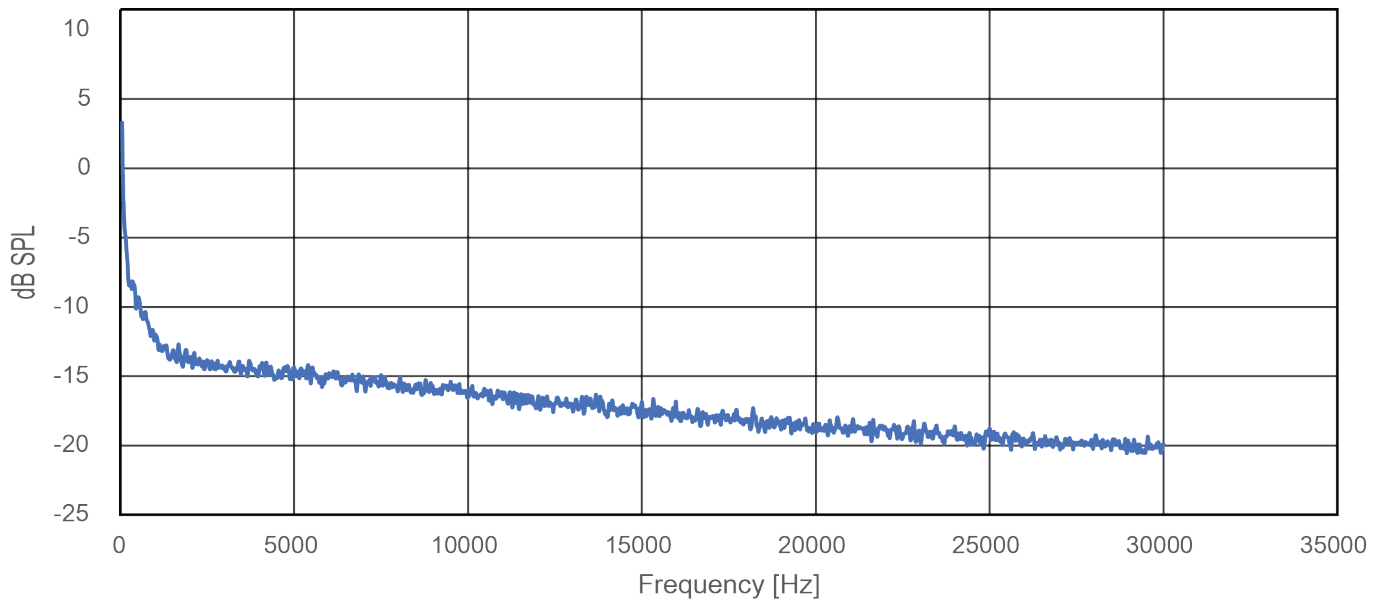


*Narrow-band FFT (1 Hz bandwidth)*

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.



Dimensions in mm

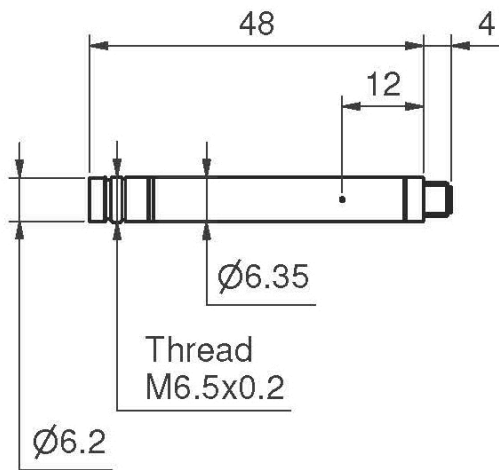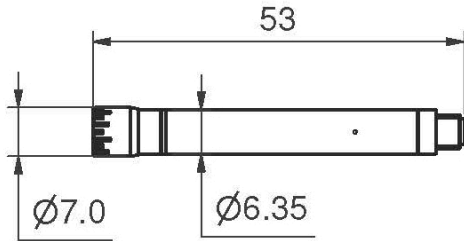

## Optional items

|   |  |
|---|--|
| <a href="#">GRAS AA0070</a>               | 3 m Microdot - BNC Cable   |
| <a href="#">GRAS AL0029</a>               | ¼" Microphone Holder, POM  |
| <a href="#">GRAS AL0013</a>               | ¼" Microphone Holder, Stainless Steel                                      |
| <a href="#">GRAS AL0005</a>               | Swivel head  |
| <a href="#">GRAS AL0006</a>               | Tripod   |
| <a href="#">GRAS AM0071</a>               | Windscreen for ¼" Microphones  |
| <a href="#">GRAS 12AL</a>                 | 1-channel CCP Power Module with A-weighting filter                         |
| <a href="#">GRAS 12BA, BB,<br/>and BE</a> | 1-, 4- and 2-channel CCP Power Modules                                     |
| <a href="#">GRAS 12AQ</a>                 | 2-channel Universal Power Module with signal conditioning and PC interface |
| <a href="#">GRAS 42AG</a>                 | Multifunction Sound Calibrator, Class 1                                    |
| <a href="#">GRAS 42AP</a>                 | Intelligent Pistonphone, Class 0   |
| GRAS RA0236                               | Adapter for frequency calibration of 46BL (also fits 46BL-1, and 46BC)     |
| GRAS CA0029                               | Traceable Calibration of Microphone Set                                    |
| GRAS CA2301                               | Accredited Calibration of Microphone Set                                   |

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

# GRAS Worldwide

Subsidiaries and distributors in more  
than 40 countries

**HEAD OFFICE, DENMARK**  
**GRAS SOUND & VIBRATION**  
Skovlytoften 33  
2840 Holte  
Denmark  
Tel: +45 4566 4046  
[www.grasacoustics.com](http://www.grasacoustics.com)  
[gras@grasacoustics.com](mailto:gras@grasacoustics.com)

**USA**  
**GRAS SOUND & VIBRATION**  
5750 S.W. Arctic Drive  
Beaverton, OR 97005  
Tel: 503-627-0832  
Toll Free: 800-231-7350  
[www.grasacoustics.com](http://www.grasacoustics.com)  
[sales-usa@grasacoustics.com](mailto:sales-usa@grasacoustics.com)

**UK**  
**GRAS SOUND & VIBRATION**  
Unit 115, Gibson House,  
Ermine Business Park, Huntingdon,  
Cambridgeshire, PE29 6XU  
Tel: +44 (0) 7762 584 202  
[www.grasacoustics.com](http://www.grasacoustics.com)  
[sales-uk@grasacoustics.com](mailto:sales-uk@grasacoustics.com)

**CHINA**  
**GRAS SOUND & VIBRATION**  
Room 303, Building T6  
Hongqiaohui, 990, Shenchang Road  
Minhang District, Shanghai  
China. 201106  
Tel: +86 21 64203370  
[www.grasacoustics.cn](http://www.grasacoustics.cn)  
[cnsales@grasacoustics.com](mailto:cnsales@grasacoustics.com)



## About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at [www.grasacoustics.com](http://www.grasacoustics.com)

[grasacoustics.com](http://grasacoustics.com)

**GRAS**  
An Axiometrix Solutions Brand