

GRAS 46BL-HT

1/4" CCP Pressure High Temperature Microphone Set, High Sensitivity



Freq range: 4 Hz to 20 kHz
Dyn range: 25 dB(A) to 144 dB
Sensitivity: 18 mV/Pa
Special feature: For high temperatures

The 46BL-HT is a high-sensitive, low-noise 1/4" CCP microphone set with rear-venting. It is optimized for high temperatures – up to 120 °C/248 °F

Introduction

The 46BL-HT is a 1/4" CCP pressure microphone set, optimized for high sensitivity, low noise and high temperatures.

It complies with IEC 61094: Measurement Microphones, Part 4: Specifications for working standard microphones, except that the upper limit of the useful frequency range is 20 kHz.

The set is individually factory-calibrated and delivered with a calibration chart stating its specific open-circuit sensitivity and pressure frequency response.

Design

The set consists of a modified 40BL 1/4" CCP Pressure Microphone, High Sensitivity and a modified 26CB 1/4" preamplifier with Microdot connector.

The diaphragm is slightly larger than usual for a 1/4" microphone, and the protective grid has been modified accordingly.

The rear-venting is through a hole close to the rear of the preamplifier, and the set has been optimized for high-temperatures up to 120 °C/248 °F.

Typical Applications and Use

The 46BL-HT can be used for applications where a 1/2" microphone would be the natural choice, but the advantages of a smaller microphone are desired. Its small dimensions mean that its presence in the sound field has minimal influence in the audible frequency range. It can be used to measure frequencies up to 20 kHz. Its high sensitivity and low noise make it ideally suited for all applications with low to moderate sound levels.

46BL-HT is ideally suited for production line testing of portable communication devices, such as cell

phones, laptop computers, tablets, GPS receivers, and similar devices using micro speakers. It is also well suited for general acoustic measurements when high sensitivity and low noise are required.

46BL-HT is heat resistant up to 120 °C/248 °F and can be used for measurements in hot environments, e.g. an engine compartment or similar. The TEDS chip can operate up to 85° Celsius.

Compability

The 46BL-HT uses a Microdot connector, which requires an input module that supports this technology. Our 1/4" rain protection cap and nose cone do not fit.

Calibration

46BL has a diaphragm that is slightly larger in diameter than is standard for 1/4" microphones. This does not affect sensitivity calibration, but for frequency calibration, you need a RA0236 Adapter.

System Verification

For daily verification and check of your measurement setup, we recommend using a calibrator like GRAS 42AG Sound Calibrator. For proper sensitivity calibration, we recommend using a pistonphone like GRAS 42AP Intelligent Pistonphone.

Calibration

Before leaving the factory, all GRAS products are calibrated in a controlled laboratory environment using traceable calibration equipment. An individual test certificate stating the sensitivity and frequency response is included with each product.

Performance and Warranty


All GRAS microphone sets are made of high-quality materials that will ensure life-long stability and

robustness. The microphone sets are all assembled in verified clean-room environments by skilled and dedicated operators with many years of expertise in this field. The microphone diaphragm, body, and improved protection grid are made of high-grade stainless steel, which makes the microphone resistant to physical damage, as well as corrosion caused by aggressive air or gasses. This, combined with the reinforced gold-plated microphone terminal which guarantees a highly reliable connection, enables GRAS to offer 5 years warranty against defective materials and workmanship.

Service and Repairs

If you accidentally damage the diaphragm on a GRAS microphone, we can—in most cases—replace it at a very reasonable cost and with a short turn-around time. This not only protects your investment, but also pleases your quality assurance department because you don't have to worry about new serial numbers, etc. All repairs are made at GRAS International Support Center located in Denmark. Our Support Center is equipped with the newest test equipment and staffed with dedicated and highly skilled engineers. Upon request, we make cost estimates based on fixed repair categories. If a product covered by warranty is sent for service, it is repaired free of charge, unless the damage is the result of negligent use or other violations of the warranty. All repairs are delivered with a service report, as well as an updated calibration chart.

Polarization/Connection		0 V / CCP
Frequency range (± 1 dB)	Hz	10 to 10 k
Frequency range (± 2 dB)	Hz	4 to 20 k
Dynamic range lower limit (microphone thermal noise)	dB(A)	25
Dynamic range upper limit	dB	147
Set sensitivity @ 250 Hz (± 2 dB)	mV/Pa	18
Set sensitivity @ 250 Hz (± 2 dB)	dB re 1V/Pa	-35
Microphone venting		Rear
IEC 61094-4 Designation		WS3P
Temperature range, operation	$^{\circ}\text{C} / ^{\circ}\text{F}$	-30 to 120 / -22 to 248
Temperature range, storage	$^{\circ}\text{C} / ^{\circ}\text{F}$	-40 to 85 / -40 to 185
Temperature coefficient @250 Hz	dB/ $^{\circ}\text{C}$ / dB/ $^{\circ}\text{F}$	-0.015/71.973 @ (-10 $^{\circ}\text{C}$ to +50 $^{\circ}\text{C}$ /14 to 122)
Static pressure coefficient @250 Hz	dB/kPa	-0.008
Humidity range non condensing	% RH	0 to 90
Influence of axial vibration @1 m/s ²	dB re 20 μPa	55
TEDS UTID (IEEE 1451.4)		27 v. 1.0
Connector type		Microdot 10/32
CE/RoHS compliant/WEEE registered		yes/yes/yes
Weight	g / oz	8

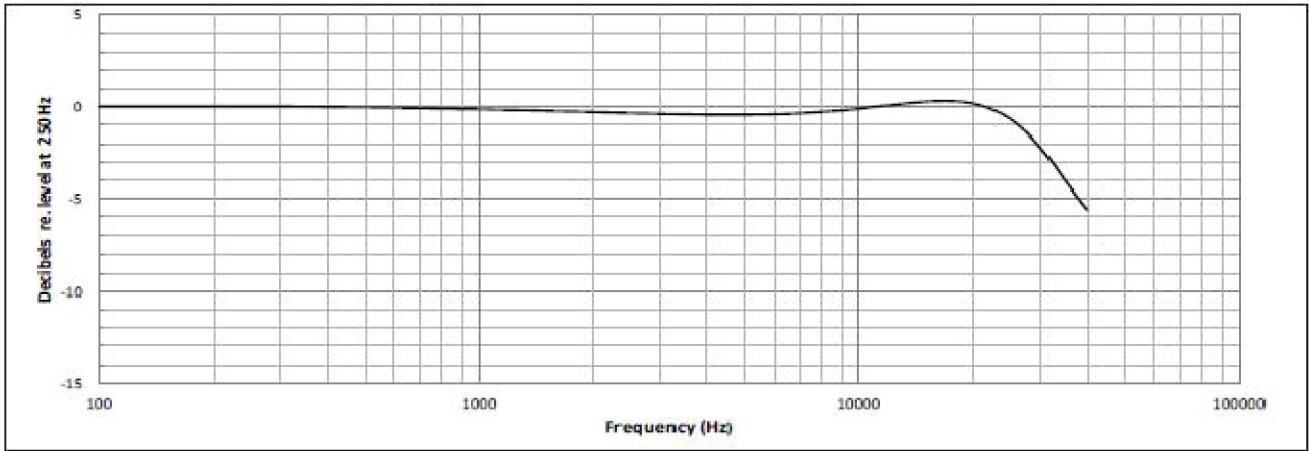



Typical frequency response.

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

Dimensions



Dimensions in mm

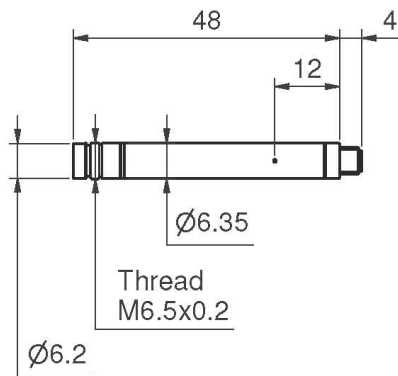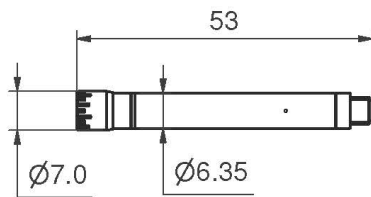

GS0654/Rev01
46BL

Optional items

GRAS AA0070	3 m Microdot - BNC Cable
GRAS AA0073- CL	Customized Length Microdot - BNC Cable
GRAS AA0087- CL	Customized Length Microdot - Microdot Cable
GRAS AL0029	1/4" Microphone Holder, POM
GRAS AL0013	1/4" Microphone Holder, Stainless Steel
GRAS AL0005	Swivel head
GRAS AL0006	Tripod
GRAS AM0071	Windscreen for 1/4" Microphones
GRAS 12AL	1-Channel CCP Power Module with A-weighting filter
GRAS 12AQ	2-Channel Universal Power Module with signal conditioning and PC interface
GRAS 42AG	Multifunction Sound Calibrator, Class 1
GRAS 42AP	Intelligent Pistonphone, Class 0
GRAS RA0236	Adapter for Frequency Calibration of 46BL

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

GRAS Worldwide

Subsidiaries and distributors in more
than 40 countries

HEAD OFFICE, DENMARK
GRAS SOUND & VIBRATION
Skovlytoften 33
2840 Holte
Denmark
Tel: +45 4566 4046
www.grasacoustics.com
gras@grasacoustics.com

USA
GRAS SOUND & VIBRATION
5750 S.W. Arctic Drive
Beaverton, OR 97005
Tel: 503-627-0832
Toll Free: 800-231-7350
www.grasacoustics.com
sales-usa@grasacoustics.com

UK
GRAS SOUND & VIBRATION
Unit 115, Gibson House,
Ermine Business Park, Huntingdon,
Cambridgeshire, PE29 6XU
Tel: +44 (0) 7762 584 202
www.grasacoustics.com
sales-uk@grasacoustics.com

CHINA
GRAS SOUND & VIBRATION
Room 303, Building T6
Hongqiaohui, 990, Shenchang Road
Minhang District, Shanghai
China. 201106
Tel: +86 21 64203370
www.grasacoustics.cn
cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.grasacoustics.com

grasacoustics.com

GRAS
An Axiometrix Solutions Brand